

EN
03|2011

Locking Assemblies for use with bending loads



Partner for performance
www.ringfeder.com

 RINGFEDER



A Global Presence For You

The RINGFEDER POWER TRANSMISSION GMBH was founded in 1922 in Krefeld, Germany to fabricate and promote Friction Spring technology. Today we have expanded our offerings to top power transmission and damping products. Innovative thinking sets us apart and allows us to develop progressive and economical solutions to support our customers.





Special applications require special solutions

Our extensive range of RINGFEDER POWER TRANSMISSION products can be applied to solve most applications. We don't just sell, but by understanding the individual requirements of our customers (e.g. loads on the components, easy installation/removal capability and reduction of production costs) assist you in every step with innovative engineering to plan efficient and technically mature solutions.



Our extensive range of RINGFEDER POWER TRANSMISSION products can be applied to solve most applications. We don't just sell, but by understanding the individual requirements of our customers (e.g. loads on the components, easy installation/removal capability and reduction of production costs) assist you in every step with innovative engineering to plan efficient and technically mature solutions.



Locking Assemblies for use with bending loads



One of the most demanding challenges on our promise of performance is the belt drum application field. The extreme loads which such components are subject to, especially the high bending moment, coupled with the simultaneous indispensable reliability and longest-possible service life require the highest in engineering know-how. Our international development team, which has already set benchmarks in quality Locking Assemblies for the RfN 7012, RfN 7012.2, RfN 7015.0 and RfN 7015.1 products, is now setting a further milestone.

The new development of the RfN 7515 Locking Assemblies has set a new benchmark in this segment with its quality, performance and price range.

Quality means: high-quality materials and material services, and the most precise workmanship, guarantee sustainable product usage.

Performance means: reliability, and long service life means: minimisation of machine standstill and maximisation of service life.

Price means: not just the newest, but also the cheapest RINGFEDER Locking Assemblies product at the high level of performance you are used to.



Belt drum with Locking Assemblies and a shrink disc on the drive side



Ready-for-shipping belt drum with Locking Assemblies

Locking Assemblies for use with bending loads



Surface roughness measurement



Hardness measurement



3-D measurement



Special surfaces for RINGFEDER Premium products

All RINGFEDER Premium products are smooth-ground as standard using a process specially developed for us. Account to this special quality feature, a consistent reproducible coefficient of friction is achieved for all Locking Assembly contact surfaces.

This exceptionally important reproducibility guarantees the consistent of defined pressure on which all Locking Assembly technical values are based.

Merely turned surfaces, even those which are precision-turned, have slip-stick effects if the cone is displaced. A type of indenting also takes place. The considerable coefficient of friction deviations which occur due to this affect the pressure, the torque transfer and the stresses in all components. Removal of the Locking Assembly is also made considerably more difficult.

RfN 7012



RfN 7012.2



RfN 7015.0



RfN 7015.1





RfN 7515



Technical Information


Pressures and stresses in Locking Assembly taking bending moment into consideration

Without bending moment loading, pressures on the contact areas of the Locking Assembly between the shaft and drum end disc is evenly distributed. Under bending moment, the pressure increases on one side and decreases rotary on the opposing side during each drum rotation. In this case, the stresses in the Locking Assembly between the bores on the side with higher pressure are subject to extreme increases, and these can destroy Locking Assemblies made of too soft or low-quality materials very quickly.

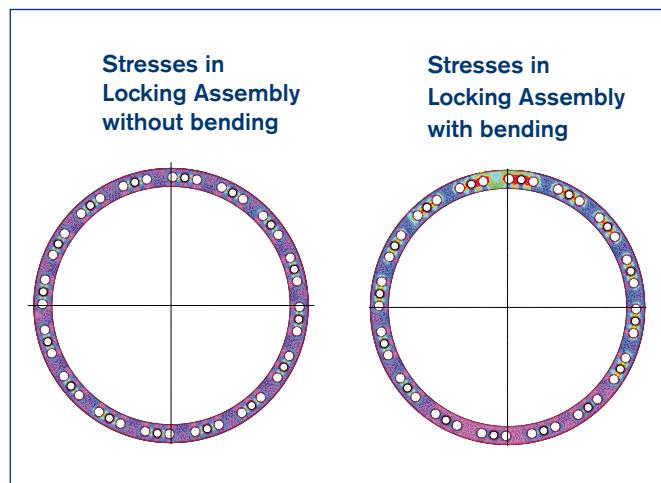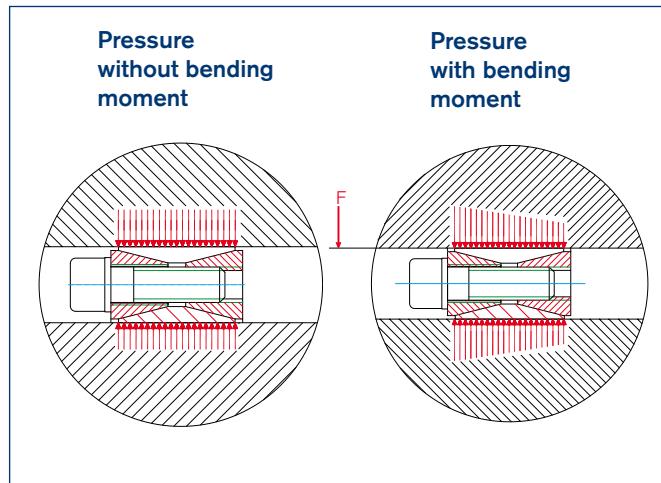


Influence of Locking Assembly width on pressure under bending moment loading

Ever wider the Locking Assembly, so much larger the leverage. In other words, larger Locking Assembly widths produce larger leverage. This means that pressure changes under bending loads are lower for wider Locking Assemblies, which in turn means that their behaviour under bending moment loads are more advantageous.

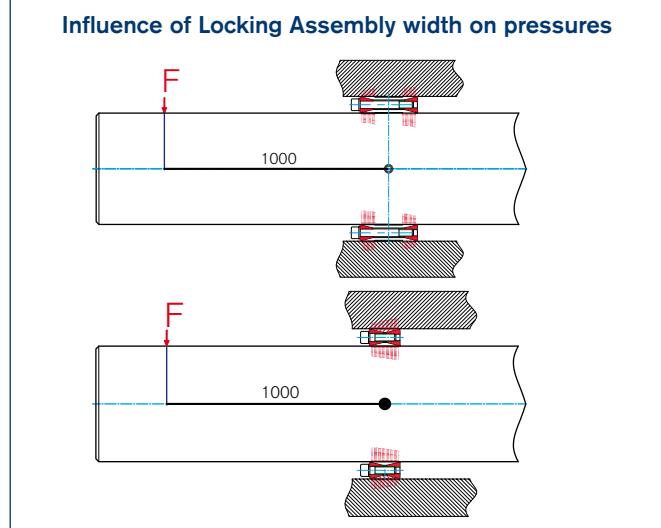

Shaft breakage due to fretting corrosion

The Locking Assembly can be subject to localised lifting on the side with lower pressure. Micro-movements between the Locking Assembly and the adjacent components occur. The fretting corrosion on which results from this causes surface damage, which can lead to cracks or even shaft breakage in worst cases.

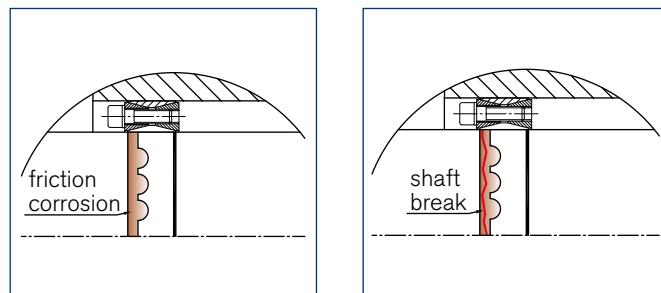

Hub loads due to pressure increases

The hub (drum end disc) is loaded over its whole circumference by the increased pressures. This means it is imperative that the drum end disc is designed to meet the maximum occurring pressure. Drum end disc which have been designed too weakly deform in a plastic manner and lead to connection failures. Drive pulleys slip if the drum end disc deforms in a plastic manner and tail pulleys start to „move“ axially.


Influence of material strength on transmissible bending moment

The loading limits can be considerably increased for applications which fall below the stated web stresses for the standard RfN 7012 Locking Assembly through the use of Locking Assemblies made of high-quality materials, e.g.: RfN 7012.2 (here, the material yield strength is around 40% greater than that of the standard Locking Assembly). This results in a tripling of the transmissible bending moment.

Technical Information


Influence of number of bores on stresses in Locking Assemblies

The number of bores made, which weaken the pressure ring, significantly influences the stresses in the Locking Assembly. Stresses can be considerably reduced through the use of lower number of bores, and the reserves made available by this can be used for additional bending moment loads.

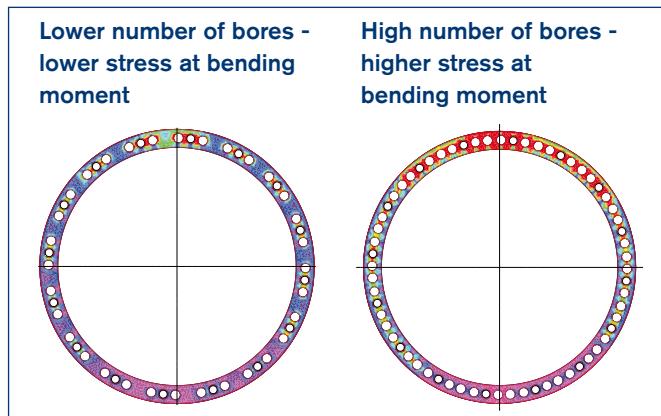

Bolt failure under excessive bending moment

The shaft deflection caused by the circumferential belt tension applies load to the clamping bolts every drum rotation. This additional axial loading leads to fatigue failures and bolt head breakage if the bolts are fully tightened. For this reason, the bolt tightening torques must be reduced depending on the series if Locking Assembly applications are subject to bending loads.

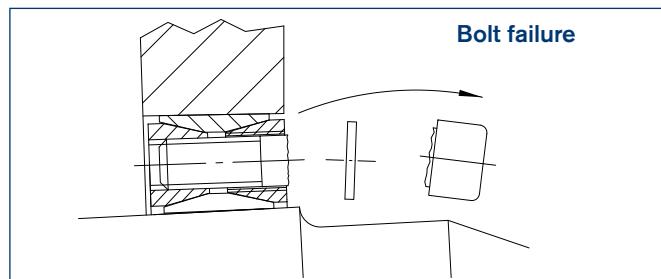

Shaft torsion and therefore no torque division on both drum ends

The shaft is torsionally softer than the drum body. For this reason, the entire torque must be transferred to the drive side. Torque division on both Locking Assemblies results in the destruction of the Locking Assembly on the drive side. (See drawing)




Start-up factor for belt drives

When belt equipment starts up, the electric motor briefly applies around 2.5 times the nominal torque. The drum fixing therefore needs to be designed to accept the start-up torque loading. If not, the connection slips or the Locking Assembly is destroyed after a short time.

Bending moment division between shaft and drum end disc

The Locking Assembly must transfer the entire bending moment if the end disc is very stiff. If the drum end disc is flexible, the bending moment to be transferred is divided between the end disc and drum shaft - the stresses from the bending moment are reduced and the Locking Assembly is protected.

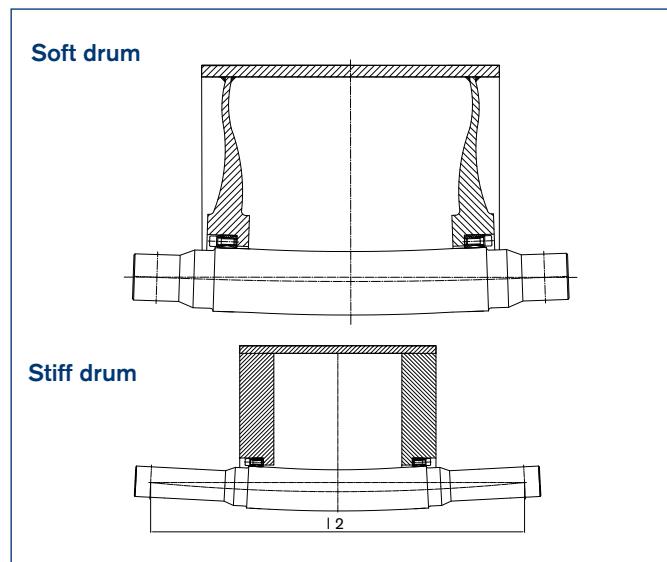

Function between bending moment, torque, pressure and bolt tightening torque

| Sample values from calculation for 400 x 495 RfN 7012.2 | | | | |
|---|----------------|-------------------|-------------------|-------------------|
| T _a | M _b | p _w | p _n | T _{res.} |
| Nm | Nm | N/mm ² | N/mm ² | Nm |
| 780 | 0 | 123 | 99 | 311700 |
| 780 | 73400 | 169 | 137 | 302900 |
| 468 | 0 | 74 | 60 | 187000 |
| 468 | 73400 | 120 | 97 | 172000 |
| 780 | 146800 | 215 | 174 | 275000 |

| Sample values from calculation for 400 x 495 RfN 7012.2 | | | | |
|---|----------------|-------------------|-------------------|-------------------|
| T _a | M _b | p _w | p _n | T _{res.} |
| Nm | Nm | N/mm ² | N/mm ² | Nm |
| 780 | 146800 | 228 | 184 | 311200 |
| 780 | 200000 | 261 | 211 | 280000 |

- This Locking Assembly was destroyed by overloading
- This Locking Assembly is able to transfer the required loads



Explanations to tables

d, D, L, I, L_1 = Basic dimensions,
Locking Assemblies not tightened

d = Locking Assembly internal diameter

D = Locking Assembly external diameter

L = length Locking Assembly

I = clamping length Locking Assembly

L_1 = overall length Locking Assembly

T_A red. = maximum bolt tightening torque under bending moment load

T without M_b = transmissible torque without bending moment

P_W without M_b = shaft pressure without bending moment

P_N without M_b = hub pressure without bending moment

M_b max. = maximum transmissible bending moment at indicated bolt tightening torque

$T_{res.}$ = remaining transmissible torque at indicated M_b and T_a

P_W at M_b max. = shaft pressure at indicated M_b max. and T_a

P_N at M_b max. = hub pressure at indicated M_b max. and T_a

Locking Assemblies for bending moments RfN 7012

| Locking Assembly dimensions | | | | | | TA red. | T without M _b | P _W without M _b | P _N without M _b | M _b max. | T _{res.} | P _W at M _b max. | P _N at M _b max. |
|-----------------------------|---|-----|-----|----|----------------|---------|--------------------------|---------------------------------------|---------------------------------------|---------------------|-------------------|---------------------------------------|---------------------------------------|
| d | x | D | L | I | L ₁ | | | | | | | | |
| mm | | | | | | Nm | kNm | N/mm ² | | kNm | | N/mm ² | |
| 100 | x | 145 | 33 | 26 | 47 | 125 | 9,6 | 196 | 135 | 2,6 | 9,2 | 245 | 169 |
| 110 | x | 155 | 33 | 26 | 47 | 125 | 10,5 | 177 | 126 | 2,7 | 10,1 | 223 | 158 |
| 120 | x | 165 | 33 | 26 | 47 | 125 | 13,0 | 184 | 134 | 3,0 | 12,7 | 231 | 168 |
| 130 | x | 180 | 38 | 34 | 52 | 125 | 17,5 | 162 | 117 | 5,0 | 16,8 | 216 | 154 |
| 140 | x | 190 | 38 | 34 | 52 | 125 | 20,7 | 164 | 121 | 5,3 | 20,0 | 218 | 161 |
| 150 | x | 200 | 38 | 34 | 52 | 125 | 24,0 | 167 | 125 | 5,9 | 23,3 | 223 | 167 |
| 160 | x | 210 | 38 | 34 | 52 | 125 | 27,7 | 169 | 129 | 6,2 | 27,0 | 224 | 170 |
| 170 | x | 225 | 44 | 38 | 60 | 190 | 32,4 | 157 | 119 | 7,8 | 31,5 | 206 | 155 |
| 180 | x | 235 | 44 | 38 | 60 | 190 | 37,3 | 161 | 123 | 8,6 | 36,4 | 212 | 162 |
| 190 | x | 250 | 52 | 46 | 68 | 190 | 45,9 | 147 | 111 | 12,0 | 44,3 | 194 | 148 |
| 200 | x | 260 | 52 | 46 | 68 | 190 | 51,6 | 149 | 114 | 12,7 | 50,0 | 197 | 151 |
| 220 | x | 285 | 56 | 50 | 74 | 295 | 66,4 | 146 | 112 | 16,5 | 64,3 | 194 | 150 |
| 240 | x | 305 | 56 | 50 | 74 | 295 | 83,1 | 153 | 120 | 15,6 | 81,6 | 195 | 154 |
| 260 | x | 325 | 56 | 50 | 74 | 295 | 101,5 | 159 | 127 | 13,4 | 100,6 | 193 | 148 |
| 280 | x | 355 | 66 | 60 | 86,5 | 405 | 124,2 | 140 | 111 | 28,9 | 120,8 | 186 | 142 |
| 300 | x | 375 | 66 | 60 | 86,5 | 405 | 149,1 | 146 | 117 | 20,2 | 147,7 | 178 | 143 |
| 320 | x | 405 | 78 | 72 | 100,5 | 580 | 207,1 | 149 | 118 | 31,0 | 204,8 | 181 | 150 |
| 340 | x | 425 | 78 | 72 | 100,5 | 580 | 219,2 | 140 | 112 | 48,2 | 213,9 | 187 | 143 |
| 360 | x | 455 | 90 | 84 | 116 | 780 | 282,4 | 138 | 109 | 62,4 | 275,4 | 181 | 142 |
| 380 | x | 475 | 90 | 84 | 116 | 780 | 297,1 | 130 | 104 | 72,4 | 288,2 | 178 | 137 |
| 400 | x | 495 | 90 | 84 | 116 | 780 | 311,7 | 123 | 99 | 73,4 | 303,0 | 169 | 141 |
| 420 | x | 515 | 90 | 84 | 116 | 780 | 362,6 | 130 | 106 | 73,1 | 355,1 | 173 | 136 |
| 440 | x | 545 | 102 | 96 | 130 | 1000 | 442,8 | 126 | 102 | 94,6 | 432,6 | 168 | 135 |
| 460 | x | 565 | 102 | 96 | 130 | 1000 | 461,7 | 121 | 98 | 106,0 | 449,4 | 165 | 136 |
| 480 | x | 585 | 102 | 96 | 130 | 1000 | 504,5 | 121 | 99 | 111,0 | 492,1 | 166 | 135 |
| 500 | x | 605 | 102 | 96 | 130 | 1000 | 549,1 | 121 | 100 | 108,0 | 528,4 | 163 | 135 |
| 520 | x | 630 | 102 | 96 | 130 | 1000 | 582,7 | 119 | 98 | 120,0 | 570,2 | 164 | 131 |
| 540 | x | 650 | 102 | 96 | 130 | 1000 | 603,6 | 114 | 95 | 120,0 | 591,6 | 158 | 134 |
| 560 | x | 670 | 102 | 96 | 130 | 1000 | 666,2 | 117 | 99 | 124,0 | 654,6 | 160 | 135 |
| 580 | x | 690 | 102 | 96 | 130 | 1000 | 717,2 | 118 | 99 | 128,0 | 705,7 | 161 | 135 |
| 600 | x | 710 | 102 | 96 | 130 | 1000 | 740,3 | 114 | 96 | 133,0 | 728,3 | 157 | 132 |
| 620 | x | 730 | 102 | 96 | 130 | 1000 | 794,0 | 114 | 97 | 137,0 | 782,0 | 157 | 133 |
| 640 | x | 750 | 102 | 96 | 130 | 1000 | 849,4 | 115 | 98 | 136,0 | 838,5 | 156 | 133 |

Ordering example: RfN 7012

| Series | d | D |
|----------|-----|-----|
| RfN 7012 | 160 | 210 |

Remark! The values of the shaft- and hub pressures have been calculated with the screw tightening shown in the tables. Increase resp. reduction of the screw tightening results in different calculation values!

Locking Assemblies for bending moments RfN 7012.2



A special bolt for type **RfN 7012.2** has been developed by RINGFEDER for the increased requirements occurring when subject to loading by bending moment.

These special bolts guarantee loadings above strength class 12.9 at simultaneous higher expansion with regard to tensile strength and yield strength.

These bolts were manufactured specially for RINGFEDER with qualified steel analysis.

Every bolt is labelled with RPT-B and the batch number. This allows every bolt to be traced back to manufacture.

The benefit of this bolt is the considerably increased fracture resistance under additional bending stress.

Explanations to tables

d, D, L, I, L₁ = Basic dimensions,
Locking Assemblies not tightened

d = Locking Assembly internal diameter

D = Locking Assembly external diameter

L = length Locking Assembly

I = clamping length Locking Assembly

L₁ = overall length Locking Assembly

T_A red. = maximum bolt tightening torque under bending moment load

T without M_b = transmissible torque without bending moment

p_W without M_b = shaft pressure without bending moment

p_N without M_b = hub pressure without bending moment

M_b max. = maximum transmissible bending moment at indicated bolt tightening torque

T_{res.} = remaining transmissible torque at indicated M_b and T_a

p_W at M_b max. = shaft pressure at indicated M_b max. and T_a

p_N at M_b max. = hub pressure at indicated M_b max. and T_a

Locking Assemblies for bending moments RfN 7012.2

| Locking Assembly dimensions | | | | | | | T without M _b | P _W without M _b | P _N without M _b | M _b max. | T _{res.} | P _W at M _b max. | P _N at M _b max. |
|-----------------------------|---|-----|-----|----|----------------|---------------------|-----------------------------|--|--|---------------------|-------------------|--|--|
| d | x | D | L | I | L ₁ | T _{A red.} | kNm | N/mm ² | kNm | N/mm ² | | | |
| mm | | | | | | | Nm | | | | | | |
| 100 | x | 145 | 33 | 26 | 47 | 125 | 10,4 | 212 | 146 | 10,0 | 2,9 | 400 | 276 |
| 110 | x | 155 | 33 | 26 | 47 | 125 | 11,4 | 192 | 136 | 10,3 | 4,8 | 368 | 261 |
| 120 | x | 165 | 33 | 26 | 47 | 125 | 14,2 | 202 | 147 | 11,8 | 8,0 | 387 | 281 |
| 130 | x | 180 | 38 | 34 | 52 | 125 | 19,5 | 180 | 130 | 15,2 | 12,1 | 346 | 250 |
| 140 | x | 190 | 38 | 34 | 52 | 125 | 23,1 | 184 | 135 | 16,0 | 16,6 | 346 | 255 |
| 150 | x | 200 | 38 | 34 | 52 | 125 | 26,9 | 187 | 140 | 14,6 | 22,6 | 326 | 244 |
| 160 | x | 210 | 38 | 34 | 52 | 125 | 31,1 | 190 | 144 | 13,3 | 28,0 | 308 | 235 |
| 170 | x | 225 | 44 | 38 | 60 | 190 | 36,2 | 175 | 132 | 25,9 | 25,4 | 337 | 254 |
| 180 | x | 235 | 44 | 38 | 60 | 190 | 41,9 | 180 | 138 | 28,5 | 30,7 | 348 | 267 |
| 190 | x | 250 | 52 | 46 | 68 | 190 | 51,7 | 165 | 126 | 37,0 | 36,1 | 312 | 237 |
| 200 | x | 260 | 52 | 46 | 68 | 190 | 56,3 | 162 | 125 | 40,0 | 39,6 | 313 | 241 |
| 220 | x | 285 | 56 | 50 | 74 | 295 | 74,6 | 164 | 126 | 50,4 | 55,0 | 313 | 241 |
| 240 | x | 305 | 56 | 50 | 74 | 295 | 84,2 | 155 | 122 | 51,9 | 66,3 | 296 | 233 |
| 260 | x | 325 | 56 | 50 | 74 | 295 | 104,7 | 164 | 131 | 48,9 | 92,6 | 287 | 229 |
| 280 | x | 355 | 66 | 60 | 86,5 | 405 | 131,6 | 148 | 117 | 82,0 | 102,9 | 285 | 225 |
| 300 | x | 375 | 66 | 60 | 86,5 | 405 | 145,2 | 143 | 114 | 83,0 | 119,2 | 272 | 217 |
| 320 | x | 405 | 78 | 72 | 100,5 | 580 | 201,7 | 145 | 115 | 126,0 | 157,5 | 276 | 218 |
| 340 | x | 425 | 78 | 72 | 100,5 | 580 | 220,6 | 141 | 113 | 132,0 | 176,8 | 270 | 216 |
| 360 | x | 455 | 90 | 84 | 116 | 780 | 293,4 | 143 | 113 | 178,0 | 233,2 | 267 | 211 |
| 380 | x | 475 | 90 | 84 | 116 | 780 | 318,3 | 139 | 111 | 194,0 | 252,4 | 267 | 213 |
| 400 | x | 495 | 90 | 84 | 116 | 780 | 344,1 | 136 | 110 | 202,0 | 278,6 | 262 | 212 |
| 420 | x | 515 | 90 | 84 | 116 | 780 | 392,0 | 140 | 114 | 195,0 | 340,1 | 256 | 209 |
| 440 | x | 545 | 102 | 96 | 130 | 1000 | 478,8 | 137 | 110 | 251,0 | 407,7 | 247 | 200 |
| 460 | x | 565 | 102 | 96 | 130 | 1000 | 512,6 | 134 | 109 | 282,0 | 428,1 | 253 | 206 |
| 480 | x | 585 | 102 | 96 | 130 | 1000 | 547,5 | 131 | 108 | 295,0 | 461,3 | 251 | 206 |
| 500 | x | 605 | 102 | 96 | 130 | 1000 | 598,1 | 132 | 109 | 304,0 | 515,0 | 250 | 207 |
| 520 | x | 630 | 102 | 96 | 130 | 1000 | 635,6 | 130 | 107 | 315,0 | 552,0 | 247 | 204 |
| 540 | x | 650 | 102 | 96 | 130 | 1000 | 674,2 | 128 | 106 | 324,0 | 591,2 | 244 | 203 |
| 560 | x | 670 | 102 | 96 | 130 | 1000 | 730,0 | 129 | 108 | 339,0 | 646,5 | 246 | 206 |
| 580 | x | 690 | 102 | 96 | 130 | 1000 | 787,9 | 129 | 109 | 353,0 | 704,4 | 248 | 208 |
| 600 | x | 710 | 102 | 96 | 130 | 1000 | 830,7 | 128 | 108 | 366,0 | 745,7 | 246 | 208 |
| 620 | x | 730 | 102 | 96 | 130 | 1000 | 874,5 | 126 | 107 | 365,0 | 794,6 | 240 | 204 |
| 640 | x | 750 | 102 | 96 | 130 | 1000 | 956,0 | 129 | 110 | 364,0 | 884,0 | 239 | 204 |

Ordering example: RfN 7012.2

| Series | d | D |
|------------|-----|-----|
| RfN 7012.2 | 200 | 260 |

Remark! The values of the shaft- and hub pressures have been calculated with the screw tightening shown in the tables. Increase resp. reduction of the screw tightening torque results in different calculation values!



Explanations to tables

d, D, L, l, L₁ = Basic dimensions,
Locking Assemblies not tightened

d = Locking Assembly internal diameter

D = Locking Assembly external diameter

L = length Locking Assembly

l = clamping length Locking Assembly

L₁ = overall length Locking Assembly

T_A red. = maximum bolt tightening torque under
bending moment load

T without M_b = transmissible torque without
bending moment

p_W without M_b = shaft pressure without bending moment

p_N without M_b = hub pressure without bending moment

M_b max. = maximum transmissible bending moment
at indicated bolt tightening torque

T_{res.} = remaining transmissible torque at
indicated M_b and T_a

p_W at M_b max. = shaft pressure at indicated M_b max.
and T_a

p_N at M_b max. = hub pressure at indicated M_b max.
and T_a

Locking Assemblies for bending moments RfN 7015.0

| Locking Assembly dimensions | | | | | | | T _A red. | without M _b | p _W without M _b | p _N without M _b | M _b max. | T _{res.} | p _W at M _b max. | p _N at M _b max. |
|-----------------------------|---|-----|-----|-----|----------------|------|---------------------|------------------------|---------------------------------------|---------------------------------------|---------------------|-------------------|---------------------------------------|---------------------------------------|
| d | x | D | L | I | L ₁ | Nm | | | | | | | | |
| mm | | | | | | | | | | | | | | |
| 100 | x | 145 | 65 | 60 | 77 | 115 | 11,3 | 157 | 108 | 10,9 | 3,0 | 214 | 147 | |
| 110 | x | 155 | 65 | 60 | 77 | 115 | 12,4 | 142 | 101 | 10,9 | 6,0 | 194 | 138 | |
| 120 | x | 165 | 65 | 60 | 77 | 115 | 16,3 | 157 | 114 | 13,0 | 9,8 | 213 | 155 | |
| 130 | x | 180 | 74 | 68 | 86 | 115 | 22,0 | 156 | 113 | 18,0 | 12,7 | 212 | 153 | |
| 140 | x | 190 | 74 | 68 | 86 | 115 | 28,5 | 174 | 128 | 19,0 | 21,2 | 229 | 169 | |
| 150 | x | 200 | 74 | 68 | 86 | 115 | 30,5 | 163 | 122 | 21,5 | 21,6 | 220 | 165 | |
| 160 | x | 210 | 74 | 68 | 86 | 115 | 38,0 | 178 | 136 | 20,0 | 32,3 | 228 | 174 | |
| 170 | x | 225 | 81 | 75 | 95 | 185 | 48,0 | 179 | 135 | 32,0 | 35,7 | 241 | 182 | |
| 180 | x | 235 | 81 | 75 | 95 | 185 | 50,8 | 169 | 129 | 32,5 | 39,0 | 229 | 175 | |
| 190 | x | 250 | 94 | 88 | 108 | 185 | 59,6 | 149 | 113 | 41,5 | 42,7 | 202 | 154 | |
| 200 | x | 260 | 94 | 88 | 108 | 185 | 75,2 | 170 | 131 | 25,0 | 71,0 | 201 | 155 | |
| 220 | x | 285 | 104 | 98 | 120 | 285 | 84,8 | 152 | 117 | 61,0 | 58,9 | 208 | 161 | |
| 240 | x | 305 | 104 | 98 | 120 | 285 | 123,3 | 186 | 146 | 45,0 | 114,8 | 224 | 177 | |
| 260 | x | 325 | 104 | 98 | 120 | 285 | 139,2 | 178 | 143 | 42,5 | 132,5 | 212 | 170 | |
| 280 | x | 355 | 126 | 120 | 144 | 390 | 174,1 | 161 | 127 | 120,0 | 126,1 | 221 | 174 | |
| 300 | x | 375 | 126 | 120 | 144 | 390 | 194,3 | 157 | 125 | 126,0 | 147,9 | 216 | 173 | |
| 320 | x | 405 | 142 | 135 | 162 | 550 | 265,7 | 159 | 125 | 155,0 | 215,8 | 211 | 167 | |
| 340 | x | 425 | 142 | 135 | 162 | 550 | 282,3 | 149 | 120 | 177,0 | 219,9 | 206 | 164 | |
| 360 | x | 455 | 165 | 158 | 187 | 745 | 371,1 | 149 | 118 | 250,0 | 274,3 | 204 | 161 | |
| 380 | x | 475 | 165 | 158 | 187 | 745 | 391,8 | 141 | 113 | 249,0 | 302,5 | 193 | 154 | |
| 400 | x | 495 | 165 | 158 | 187 | 745 | 412,4 | 134 | 108 | 250,0 | 328,0 | 184 | 148 | |
| 420 | x | 515 | 165 | 158 | 187 | 745 | 519,6 | 153 | 125 | 300,0 | 424,3 | 210 | 171 | |
| 440 | x | 545 | 180 | 172 | 204 | 960 | 639,7 | 154 | 124 | 370,0 | 521,8 | 210 | 170 | |
| 460 | x | 565 | 180 | 172 | 204 | 960 | 668,8 | 147 | 120 | 370,0 | 557,1 | 200 | 163 | |
| 480 | x | 585 | 180 | 172 | 204 | 960 | 744,4 | 150 | 123 | 395,0 | 647,0 | 182 | 149 | |
| 500 | x | 605 | 180 | 172 | 204 | 960 | 775,4 | 144 | 119 | 395,0 | 667,2 | 197 | 163 | |
| 520 | x | 630 | 200 | 190 | 227 | 1440 | 1014,4 | 156 | 129 | 530,0 | 864,9 | 211 | 174 | |
| 540 | x | 650 | 200 | 190 | 227 | 1440 | 1053,4 | 150 | 125 | 530,0 | 910,3 | 203 | 168 | |
| 560 | x | 670 | 200 | 190 | 227 | 1440 | 1092,4 | 145 | 121 | 530,0 | 955,2 | 195 | 163 | |
| 580 | x | 690 | 200 | 190 | 227 | 1440 | 1131,4 | 140 | 118 | 532,0 | 998,5 | 189 | 159 | |
| 600 | x | 710 | 200 | 190 | 227 | 1440 | 1248,4 | 144 | 122 | 566,0 | 1.112,8 | 195 | 164 | |
| 620 | x | 730 | 200 | 190 | 227 | 1440 | 1290,1 | 140 | 119 | 573,0 | 1.155,8 | 189 | 160 | |
| 640 | x | 750 | 200 | 190 | 227 | 1440 | 1456,5 | 148 | 126 | 576,0 | 1.337,8 | 196 | 168 | |

Ordering example: RfN 7015.0

| Baureihe/Series | d | D |
|-----------------|-----|-----|
| RfN 7015.0 | 240 | 305 |

Remark! The values of the shaft- and hub pressures have been calculated with the screw tightening shown in the tables. Increase resp. reduction of the screw tightening torque results in different calculation values!



Explanations to tables

d, D, L, I, L₁ = Basic dimensions,
Locking Assemblies not tightened

d = Locking Assembly internal diameter

D = Locking Assembly external diameter

L = length Locking Assembly

I = clamping length Locking Assembly

L₁ = overall length Locking Assembly

T_A = maximum bolt tightening torque under
bending moment load

T without M_b = transmissible torque without
bending moment

p_W without M_b = shaft pressure without bending moment

p_N without M_b = hub pressure without bending moment

M_b max. = maximum transmissible bending moment
at indicated bolt tightening torque

T_{res.} = remaining transmissible torque at
indicated M_b and T_a

p_W at M_b max. = shaft pressure at indicated M_b max.
and T_a

p_N at M_b max. = hub pressure at indicated M_b max.
and T_a

Locking Assemblies for bending moments RfN 7015.1

| Locking Assembly dimensions | | | | | | T _A | without M _b | | | M _b max. | T _{res.} | p _W at M _b max. | p _N at M _b max. |
|-----------------------------|---|-----|-----|-----|----------------|----------------|------------------------|-------------------|----------------|---------------------|-------------------|---------------------------------------|---------------------------------------|
| d | x | D | L | I | L ₁ | | T | p _W | p _N | | | | |
| mm | | | | | | Nm | kNm | N/mm ² | | kNm | | N/mm ² | |
| 100 | x | 145 | 65 | 60 | 75 | 83 | 6,6 | 91 | 63 | 6,1 | 2,5 | 123 | 85 |
| 110 | x | 155 | 65 | 60 | 75 | 83 | 8,0 | 92 | 65 | 6,8 | 4,3 | 124 | 88 |
| 120 | x | 165 | 65 | 60 | 75 | 83 | 10,5 | 101 | 74 | 8,1 | 6,7 | 137 | 99 |
| 130 | x | 180 | 74 | 68 | 84 | 83 | 14,2 | 101 | 73 | 11,0 | 9,1 | 135 | 98 |
| 140 | x | 190 | 74 | 68 | 84 | 83 | 15,3 | 94 | 69 | 11,0 | 10,7 | 125 | 92 |
| 150 | x | 200 | 74 | 68 | 84 | 83 | 17,5 | 94 | 70 | 11,7 | 13,1 | 125 | 94 |
| 160 | x | 210 | 74 | 68 | 84 | 83 | 21,0 | 99 | 75 | 13,2 | 16,4 | 132 | 100 |
| 170 | x | 225 | 81 | 75 | 93 | 145 | 27,4 | 105 | 80 | 17,4 | 21,1 | 140 | 106 |
| 180 | x | 235 | 81 | 75 | 93 | 145 | 30,9 | 106 | 81 | 18,2 | 25,0 | 140 | 107 |
| 190 | x | 250 | 94 | 88 | 106 | 145 | 36,7 | 96 | 73 | 24,5 | 27,3 | 128 | 97 |
| 200 | x | 260 | 94 | 88 | 106 | 145 | 42,9 | 101 | 78 | 27,0 | 33,4 | 135 | 104 |
| 220 | x | 285 | 104 | 98 | 116 | 145 | 49,6 | 89 | 69 | 34,6 | 35,5 | 121 | 93 |
| 240 | x | 305 | 104 | 98 | 116 | 145 | 61,8 | 93 | 73 | 39,0 | 47,9 | 126 | 99 |
| 260 | x | 325 | 104 | 98 | 116 | 145 | 75,3 | 97 | 77 | 44,7 | 60,6 | 132 | 105 |
| 280 | x | 355 | 126 | 120 | 140 | 230 | 115,0 | 106 | 84 | 74,0 | 88,1 | 144 | 113 |
| 300 | x | 375 | 126 | 120 | 140 | 230 | 123,3 | 99 | 80 | 74,1 | 98,5 | 134 | 107 |
| 320 | x | 405 | 142 | 135 | 158 | 355 | 180,0 | 110 | 87 | 113,0 | 140,1 | 148 | 117 |
| 340 | x | 425 | 142 | 135 | 158 | 355 | 191,2 | 103 | 83 | 111,0 | 155,7 | 139 | 111 |
| 360 | x | 455 | 165 | 158 | 183 | 485 | 209,6 | 84 | 67 | 132,0 | 162,8 | 113 | 90 |
| 380 | x | 475 | 165 | 158 | 183 | 485 | 248,9 | 90 | 72 | 149,0 | 199,4 | 121 | 97 |
| 400 | x | 495 | 165 | 158 | 183 | 485 | 310,6 | 101 | 82 | 177,0 | 255,2 | 136 | 110 |
| 420 | x | 515 | 165 | 158 | 183 | 485 | 326,1 | 96 | 78 | 177,0 | 273,9 | 130 | 106 |
| 440 | x | 545 | 180 | 172 | 200 | 690 | 372,8 | 91 | 74 | 206,0 | 310,7 | 122 | 99 |
| 460 | x | 565 | 180 | 172 | 200 | 690 | 389,7 | 87 | 71 | 211,0 | 327,7 | 118 | 96 |
| 480 | x | 585 | 180 | 172 | 200 | 690 | 451,8 | 93 | 76 | 234,0 | 386,5 | 125 | 103 |
| 500 | x | 605 | 180 | 172 | 200 | 690 | 470,7 | 89 | 74 | 236,0 | 407,2 | 120 | 99 |
| 520 | x | 630 | 200 | 190 | 220 | 690 | 522,1 | 80 | 66 | 272,0 | 445,7 | 108 | 89 |
| 540 | x | 650 | 200 | 190 | 220 | 690 | 542,2 | 77 | 64 | 274,0 | 467,9 | 104 | 87 |
| 560 | x | 670 | 200 | 190 | 220 | 690 | 632,6 | 84 | 70 | 309,0 | 552,0 | 113 | 95 |
| 580 | x | 690 | 200 | 190 | 220 | 690 | 655,2 | 81 | 68 | 304,0 | 580,4 | 109 | 92 |
| 600 | x | 710 | 200 | 190 | 220 | 690 | 677,8 | 78 | 66 | 305,0 | 605,3 | 105 | 89 |
| 620 | x | 730 | 200 | 190 | 220 | 690 | 700,4 | 76 | 64 | 307,0 | 629,5 | 102 | 87 |
| 640 | x | 750 | 200 | 190 | 220 | 690 | 723,0 | 73 | 63 | 307,0 | 654,5 | 99 | 85 |

Ordering example: RfN 7015.1

| Series | d | D |
|------------|-----|-----|
| RfN 7015.1 | 620 | 730 |

Remark! The values of the shaft- and hub pressures have been calculated with the screw tightening shown in the tables. Increase resp. reduction of the screw tightening torque results in different calculation values!



Explanations to tables

d, D, L, I, L₁ = Basic dimensions,
Locking Assemblies not tightened

d = Locking Assembly internal diameter

D = Locking Assembly external diameter

L = length Locking Assembly

I = clamping length Locking Assembly

L₁ = overall length Locking Assembly

T_A = maximum bolt tightening torque under
bending moment load

T without M_b = transmissible torque without
bending moment

p_W without M_b = shaft pressure without bending moment

p_N without M_b = hub pressure without bending moment

M_b max. = maximum transmissible bending moment
at indicated bolt tightening torque

T_{res.} = remaining transmissible torque at
indicated M_b and T_a

p_W at M_b max. = shaft pressure at indicated M_b max.
and T_a

p_N at M_b max. = hub pressure at indicated M_b max.
and T_a

Locking Assemblies for bending moments RfN 7515


| Locking Assembly dimensions | | | | | | T _A | without M _b | | | M _b max. | T _{res.} | p _W at M _b max. | p _N at M _b max. | |
|-----------------------------|---|-----|-----|-----|----------------|----------------|------------------------|-------------------|----------------|---------------------|-------------------|---------------------------------------|---------------------------------------|--|
| d | x | D | L | I | L ₁ | | T | p _W | p _N | | | | | |
| mm | | | | | | Nm | kNm | N/mm ² | kNm | | N/mm ² | | N/mm ² | |
| 100 | x | 145 | 70 | 60 | 82 | 145 | 18,9 | 209 | 144 | 8,1 | 17,1 | 245 | 169 | |
| 110 | x | 155 | 70 | 60 | 82 | 145 | 20,8 | 190 | 135 | 9,0 | 18,7 | 227 | 161 | |
| 120 | x | 165 | 70 | 60 | 82 | 145 | 24,9 | 191 | 139 | 11,0 | 22,4 | 233 | 169 | |
| 130 | x | 180 | 79 | 65 | 91 | 145 | 34,4 | 207 | 150 | 12,5 | 32,0 | 242 | 175 | |
| 140 | x | 190 | 79 | 65 | 91 | 145 | 39,7 | 206 | 152 | 16,4 | 36,1 | 249 | 183 | |
| 150 | x | 200 | 79 | 65 | 91 | 145 | 42,5 | 193 | 144 | 18,0 | 38,5 | 236 | 177 | |
| 160 | x | 210 | 79 | 65 | 91 | 145 | 48,3 | 193 | 147 | 19,0 | 44,5 | 236 | 180 | |
| 170 | x | 225 | 92 | 78 | 106 | 230 | 65,8 | 195 | 147 | 25,0 | 60,9 | 234 | 177 | |
| 180 | x | 235 | 92 | 78 | 106 | 230 | 69,7 | 184 | 141 | 27,6 | 64,0 | 225 | 172 | |
| 190 | x | 250 | 102 | 88 | 116 | 230 | 78,4 | 165 | 125 | 33,5 | 70,9 | 202 | 154 | |
| 200 | x | 260 | 102 | 88 | 116 | 230 | 92,9 | 176 | 135 | 39,5 | 84,1 | 218 | 168 | |
| 220 | x | 285 | 110 | 96 | 124 | 355 | 116,5 | 173 | 133 | 52,0 | 104,2 | 216 | 167 | |
| 240 | x | 305 | 110 | 96 | 124 | 355 | 169,4 | 211 | 166 | 43,0 | 163,8 | 244 | 192 | |
| 260 | x | 325 | 110 | 96 | 124 | 355 | 192,7 | 184 | 148 | 77,2 | 176,5 | 237 | 190 | |
| 280 | x | 355 | 110 | 96 | 130 | 690 | 230,2 | 205 | 162 | 105,0 | 204,9 | 273 | 216 | |
| 300 | x | 375 | 110 | 96 | 130 | 690 | 263,1 | 204 | 163 | 109,5 | 239,2 | 271 | 217 | |
| 320 | x | 405 | 136 | 124 | 156 | 690 | 350,8 | 189 | 150 | 141,6 | 320,9 | 242 | 191 | |
| 340 | x | 425 | 136 | 124 | 156 | 690 | 372,7 | 178 | 143 | 154,0 | 339,4 | 232 | 185 | |
| 360 | x | 455 | 155 | 140 | 177 | 930 | 487,6 | 174 | 137 | 219,0 | 435,6 | 228 | 180 | |
| 380 | x | 475 | 155 | 140 | 177 | 930 | 514,6 | 164 | 132 | 228,0 | 461,4 | 218 | 174 | |
| 400 | x | 495 | 155 | 140 | 177 | 930 | 595,9 | 172 | 139 | 240,8 | 545,1 | 226 | 182 | |
| 420 | x | 515 | 155 | 140 | 177 | 930 | 682,6 | 179 | 146 | 277,6 | 623,6 | 237 | 194 | |
| 440 | x | 535 | 155 | 140 | 177 | 930 | 715,1 | 170 | 138 | 306,0 | 646,3 | 232 | 188 | |
| 460 | x | 555 | 155 | 140 | 177 | 930 | 747,6 | 163 | 133 | 320,0 | 675,6 | 225 | 183 | |
| 480 | x | 575 | 155 | 140 | 177 | 930 | 812,6 | 163 | 133 | 341,0 | 737,6 | 226 | 185 | |
| 500 | x | 595 | 155 | 140 | 177 | 930 | 846,5 | 156 | 129 | 352,0 | 769,8 | 219 | 181 | |
| 520 | x | 615 | 155 | 140 | 177 | 930 | 985,9 | 168 | 139 | 418,0 | 893,0 | 240 | 198 | |
| 540 | x | 635 | 155 | 140 | 177 | 930 | 1023,9 | 162 | 135 | 432,0 | 928,3 | 233 | 194 | |
| 560 | x | 655 | 155 | 140 | 177 | 930 | 1137,6 | 167 | 140 | 471,0 | 1035,6 | 242 | 203 | |
| 580 | x | 675 | 155 | 140 | 177 | 930 | 1178,3 | 162 | 136 | 479,6 | 1076,2 | 235 | 198 | |
| 600 | x | 695 | 155 | 140 | 177 | 930 | 1218,9 | 156 | 132 | 505,0 | 1109,4 | 231 | 195 | |
| 620 | x | 715 | 155 | 140 | 177 | 930 | 1259,5 | 151 | 128 | 515,0 | 1149,4 | 225 | 191 | |
| 640 | x | 735 | 155 | 140 | 177 | 930 | 1300,2 | 146 | 125 | 522,0 | 1190,8 | 219 | 187 | |

Ordering example: RfN 7515

| Series | d | D |
|----------|-----|-----|
| RfN 7515 | 300 | 375 |

Remark! The values of the shaft- and hub pressures have been calculated with the screw tightening shown in the tables. Increase resp. reduction of the screw tightening torque results in different calculation values!

Calculation program

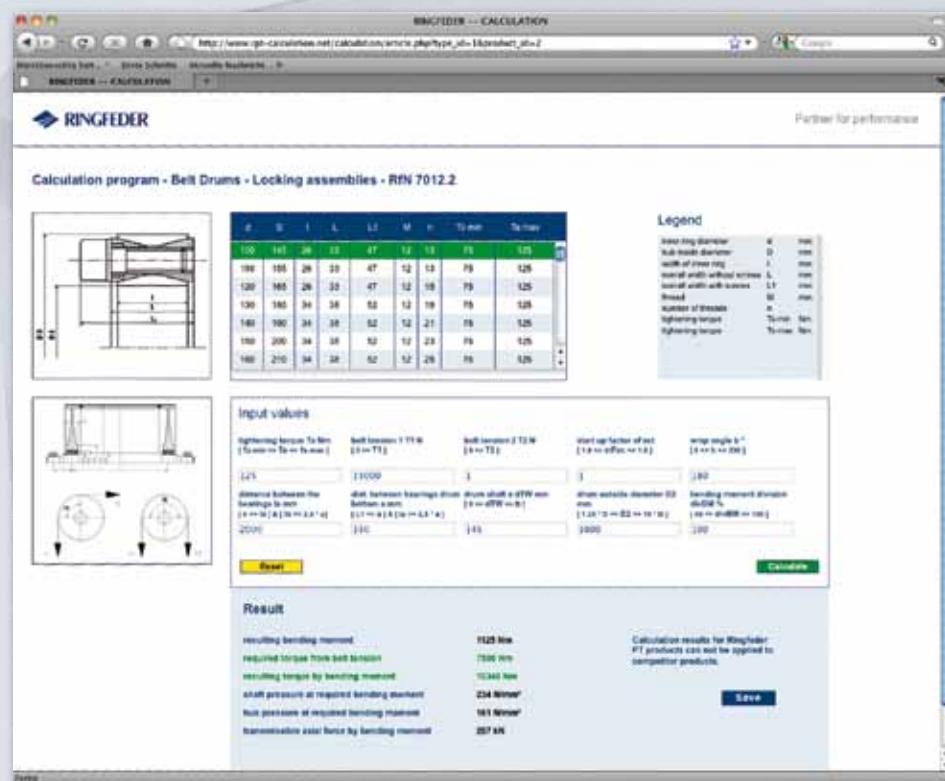

In order to meet the complex requirements on the correct design and selection of RINGFEDER products under bending moment loading, RINGFEDER POWER TRANSMISSION GMBH has developed a calculation program.

This calculation program offers the engineer a valuable aid in the calculation of forces and loads occurring in materials subject to bending moment.

After the product has been selected, e.g. RfN 7012, RfN 7012.2, RfN 7015.0, RfN 7015.1 or RfN 7515, the engineer first selects the required diameter of the Locking Assembly. After this, the engineer can make his input and start the calculation.

The results field shows immediately whether the torque resulting from the belt tensions is above the required torque, in addition to the output of further calculation results, and whether the product complies with the loads under bending moment loading at the selected size.

Interested? Visit our website [www.ringfeder.com!](http://www.ringfeder.com)

For a design proposal using RINGFEDER® Locking Assemblies in belt drums

To: RINGFEDER POWER TRANSMISSION GMBH / sales.international@ringfeder.com

From:


Company:

Phone:

Contact:

Fax:

E-Mail:

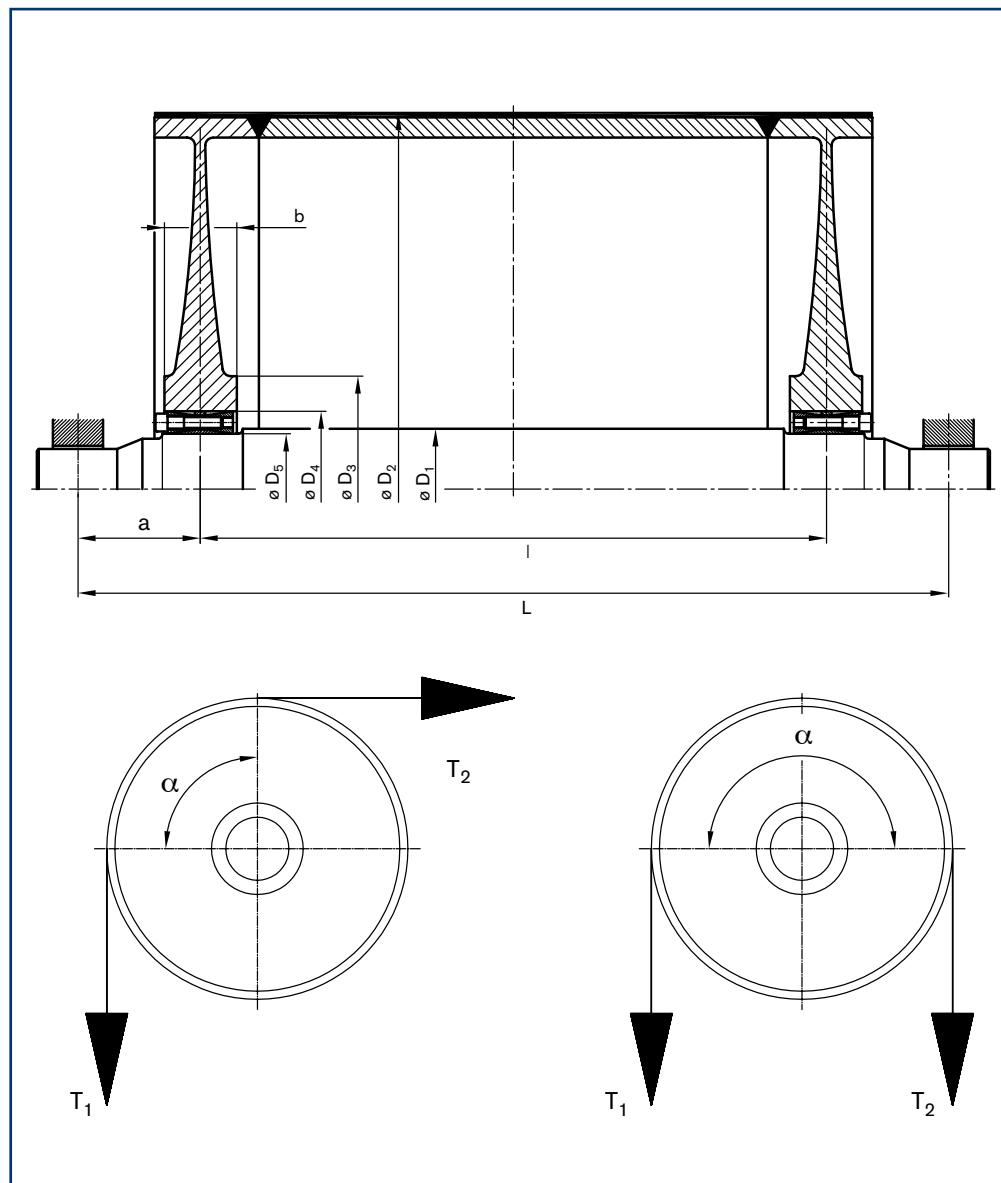

Dimensions:

$D_1 = \underline{\hspace{2cm}}$ mm

$D_2 = \underline{\hspace{2cm}}$ mm

$D_3 = \underline{\hspace{2cm}}$ mm

$D_4 = \underline{\hspace{2cm}}$ mm

$D_5 = \underline{\hspace{2cm}}$ mm

$L = \underline{\hspace{2cm}}$ mm

$| = \underline{\hspace{2cm}}$ mm

$a = \underline{\hspace{2cm}}$ mm


$b = \underline{\hspace{2cm}}$ mm

Loads:

$T_1 = \underline{\hspace{2cm}}$ N

$\alpha = \underline{\hspace{2cm}}^\circ$

$T_2 = \underline{\hspace{2cm}}$ N

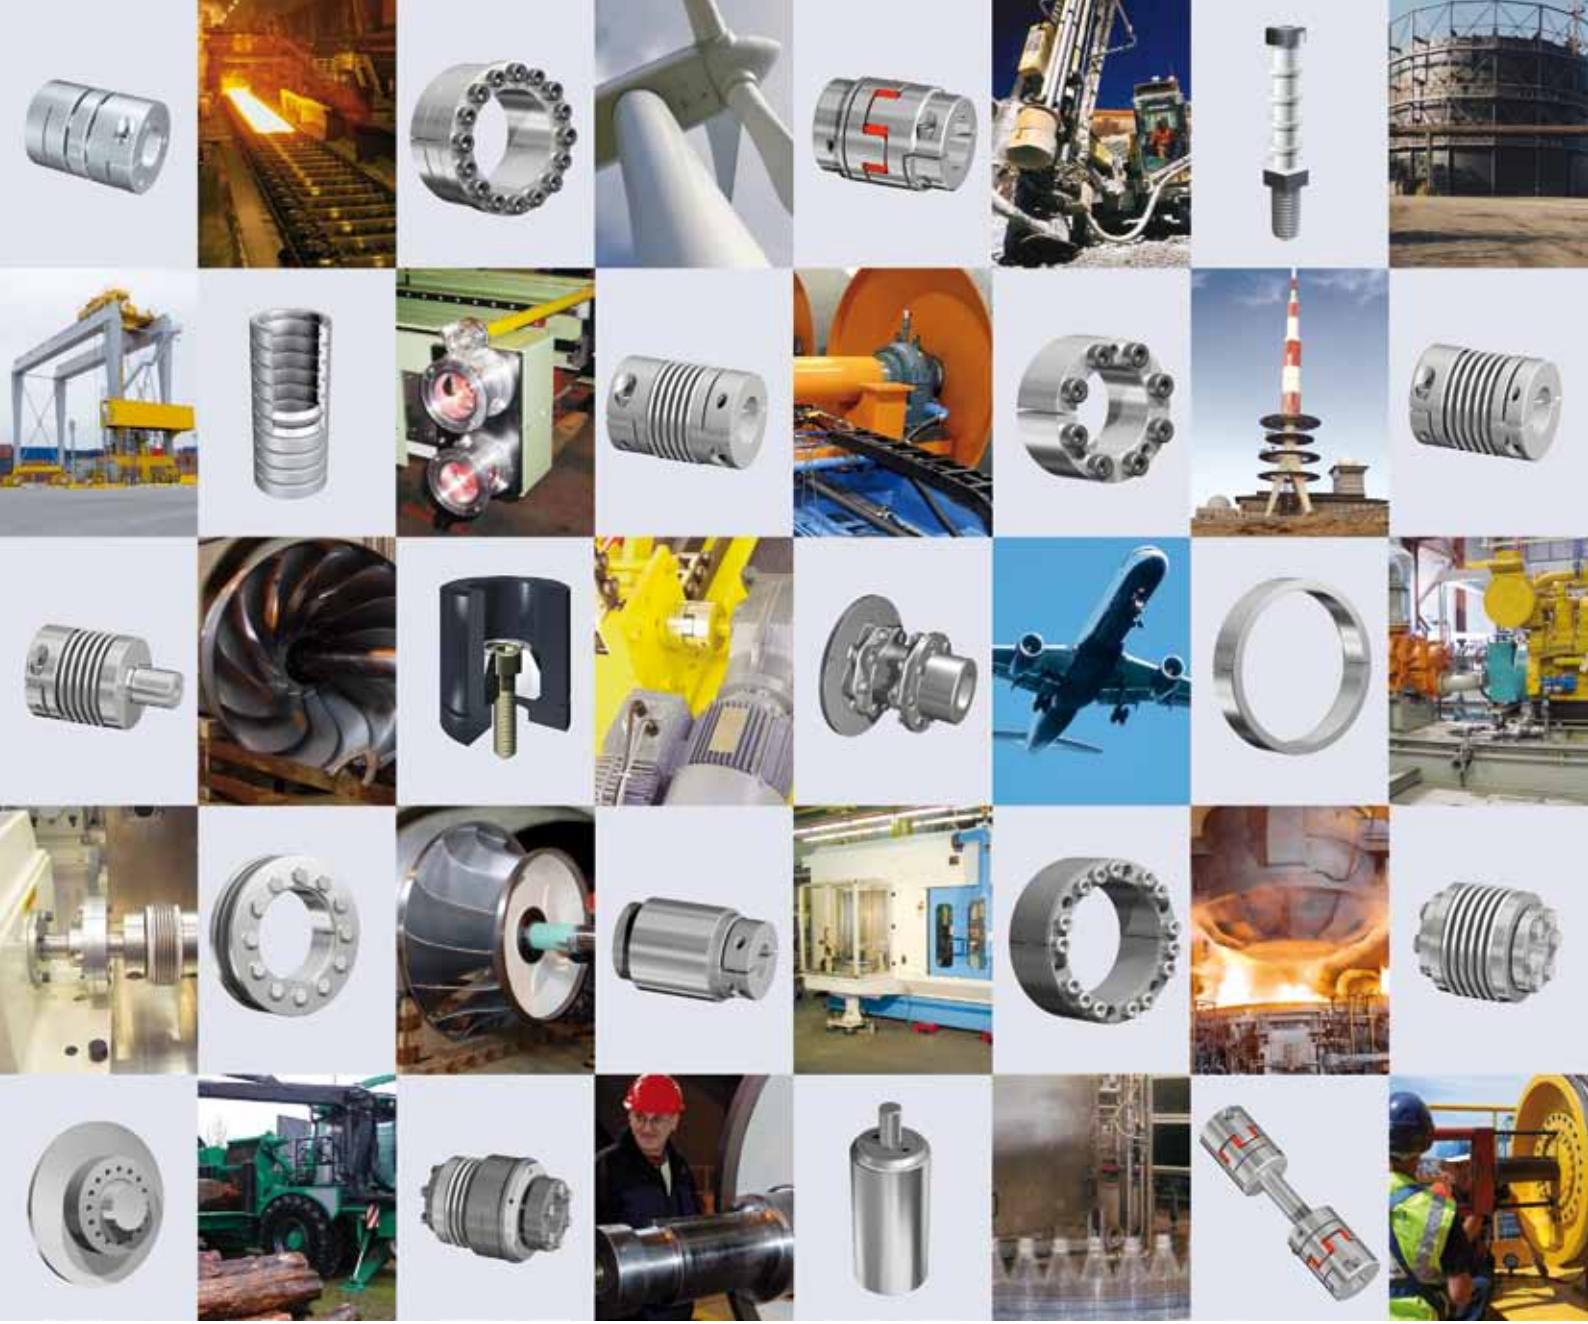

RINGFEDER POWER TRANSMISSION GMBH

- Oberschlesienstr. 15, D-47807 Krefeld, Germany
- Lütztaler Str. 5a, D-63868 Großwallstadt, Germany · Phone: +49 (0) 6022 2204-0 · Fax: +49 (0) 6022 2204-11
- E-mail: sales.international@ringfeder.com · E-mail: sales.international@gerwah.com

RINGFEDER POWER TRANSMISSION USA CORPORATION

165 Carver Avenue, P.O. Box 691 Westwood, NJ 07675, USA · Toll Free: +1 888 746-4333 · Phone: +1 201 666 3320
Fax: +1 201 664 6053 · E-mail: sales.usa@ringfeder.com · E-mail: sales.usa@gerwah.com

RINGFEDER POWER TRANSMISSION INDIA PRIVATE LIMITED

Plot No. 4, Door No. 220, Mount - Poonamallee Road, Kattupakkam, Chennai – 600 056, India
Phone: +91 (0) 44-2649-6411 · Fax: +91 (0) 44-2649-6422 · E-mail: sales.india@ringfeder.com · E-mail: sales.india@gerwah.com

KUNSHAN RINGFEDER POWER TRANSMISSION COMPANY LIMITED

German Industry Park, No. 508 Hengguanjing Road, Zhangpu Town 215321, Kunshan City, P.R. China
Phone: +86 (0) 512-5745-3960 · Fax: +86 (0) 512-5745-3961 · E-mail: sales.china@ringfeder.com